




尺寸图 Dimensional drawing

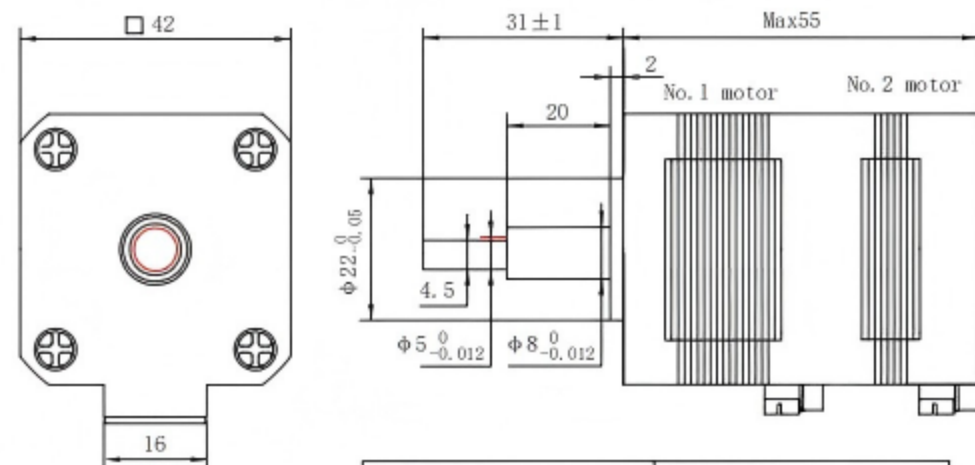

绕线图 Wiring Diagram



	No. 1 motor	No. 2 motor
1.步距角 Step angle	1.8° ±5%	1.8° ±5%
2.相数 Number of phase	2	2
3.相电压 Phase voltage	6.3 VDC	5.7 VDC
4.相电流 Phase current	1.5 Amp	1.5 Amp
5.相电阻 Phase resistance	4.25 Ω ±10% (At 20° C)	3.85 Ω ±10% (At 20° C)
6.相电感 Phase inductance	9.0 mH ±20%	4.9 mH ±20%
7.静力矩 Static moment	0.25 N.m	0.17 N.m
8.绝缘等级 Insulation class	Class B	Class B
9.绝缘电阻 Insulation resistance	100MΩ min. (500V DC)	100MΩ min. (500V DC)
10.环境温度 Ambient temperature	-20° ~ +50°	-20° ~ +50°
11.环境湿度 Ambient hum	15% to 95%	15% to 95%
12.电机重量 Motor weight	Approx 0.48 Kg	Approx ~ Kg
13.使用电压 Use voltage	VDC:12-24V	VDC:12-24V
14.推荐驱动器 Recommended drive	OK2D4020A	OK2D4020A

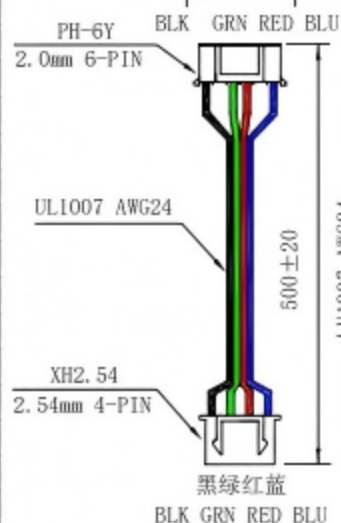

Excitation sequence and direction of clockwise

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

seen from the mounting surface It is clockwise

工艺 Technology	单位 Unit	mm
设计 Design		
审核 Check		
批准 Approved	Betty Y	比列 Scale 1: 1

Drawing

42HC55-154A-S2

Shenzhen Sunshine Sea Technology Co., Ltd