



尺寸图 Dimensional drawing

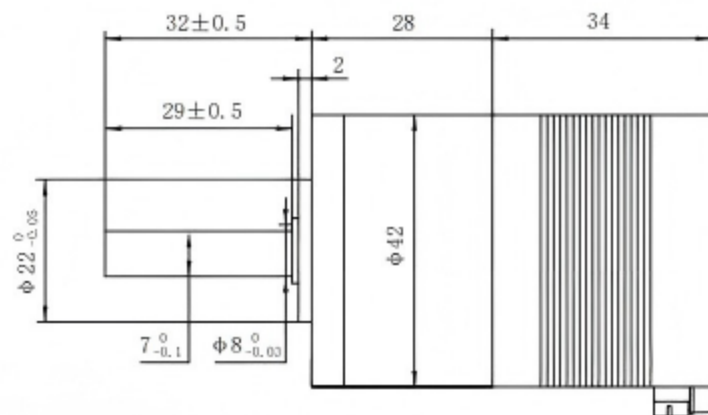

绕线图 Wiring Diagram

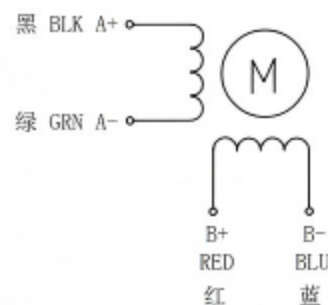


Excitation sequence and direction of clockwise

STEP	A+	B+	A-	B-	
1	+	+	-	-	CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

seen from the mounting surface it is clockwise

1.步距角 Step angle	1.8° ±5%
2.相 数 Number of phase	2
3.相电压 Phase voltage	3.6 VDC
4.相电流 Phase current	1.33 Amp
5.相电阻 Phase resistance	2.7 Ω ±10% (At 20° C)
6.相电感 Phase inductance	4.2 mH ±20%
7.静力矩 Static moment	0.32 N.m
8.绝缘等级 Insulation class	Class B
9.绝缘电阻 Insulation resistance	100M Ω min. (500V DC)
10.环境温度 Ambient temperature	-20° → +50°
11.环境湿度 Ambient hum	15% to 95%
12.电机重量 Motor weight	Approx 0.4 Kg
13.使用电压 Use voltage	VDC:12-36V
14.推荐驱动器 Recommended drive	OK2D4020A

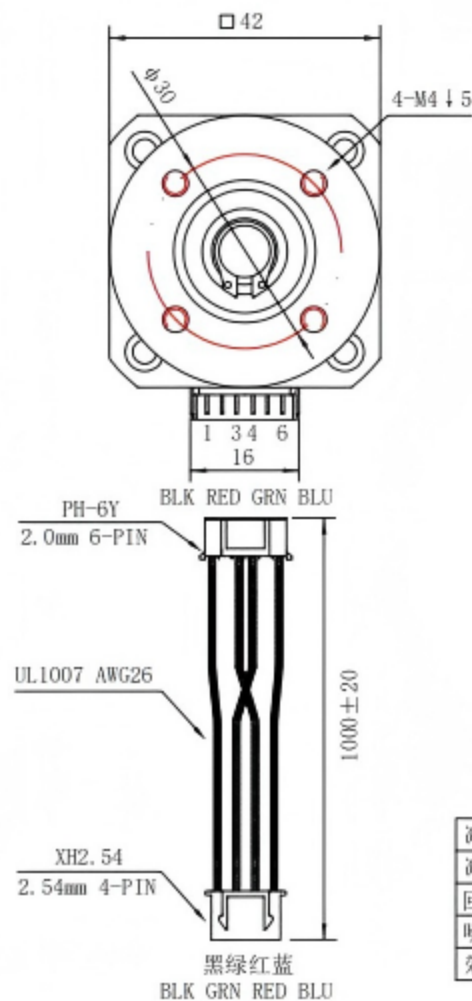

减速机级数 Reducer series	Level 1
减速比 Exact reduction ratio	10
回差 Arcmin (arcmin)	≤15
噪音 (DB) Noise	≤58
效率 Efficiency %	95

工艺 Technology		单位 Unit	mm		Drawing	42HC34-HG10-32D
设计 Design						
审核 Check						
批准 Approved	Betty Y	比列 Scale	1: 1			