


尺寸图 Dimensional drawing

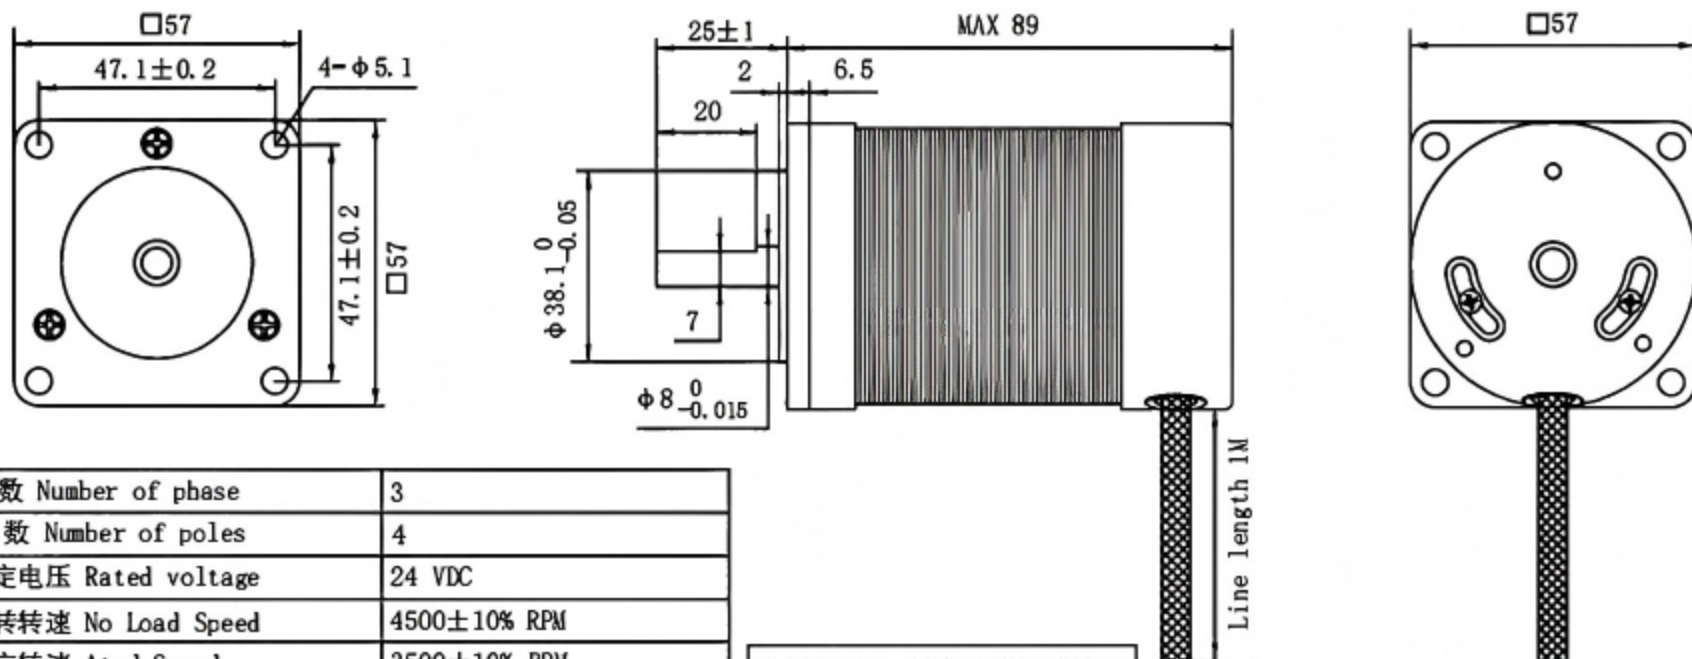

1.相数 Number of phase	3
2.级数 Number of poles	4
3.额定电压 Rated voltage	24 VDC
4.空转转速 No Load Speed	$4500 \pm 10\%$ RPM
5.额定转速 Ated Speed	$3500 \pm 10\%$ RPM
6.额定电流 Rated Current(Max.)	14 A
7.额定功率 Rated power	220W
8.额定力矩 Rated Torque	0.6 N.m
9.绝缘电阻 Insulation resistance	$100M\Omega$ min. (500V DC)
10.环境温度 Ambient temperature	$-20^\circ \sim +50^\circ$
11.环境湿度 Ambient hum	15% to 95%
12.电机重量 Motor weight	Approx 1.1 Kg
13.绝缘等级 Insulation class	B

ELECTRICAL CONNECTION TABLE

+5V	RED	红	UL1569 26 AWG
HALL U	YEL	黄	
HALL V	GRN	绿	
HALL W	BLU	蓝	
GND	BLK	黑	UL1569 16 AWG
PHASE U	YEL	黄	
PHASE V	GRN	绿	
PHASE W	BLU	蓝	

备注: 端盖白色
End cover white

旋转方向 Rotation direction	
电机线 Motor wire	U V 对换 Swap
霍尔线 Hall line	U W 对换 Swap
Changing the direction of rotation	
对换接线 可以改变电机旋转方向	

设计 Design		单位 Unit	mm
工艺 Technology			
审核 Chck			
批准 Approved	Betty Y	比列 Scale	

DRAWING

57BLS89-235A-1R

Shenzhen Sunshine Sea Technology Co.,Ltd