


尺寸图 Dimensional drawing

绕线图 Wiring Diagram

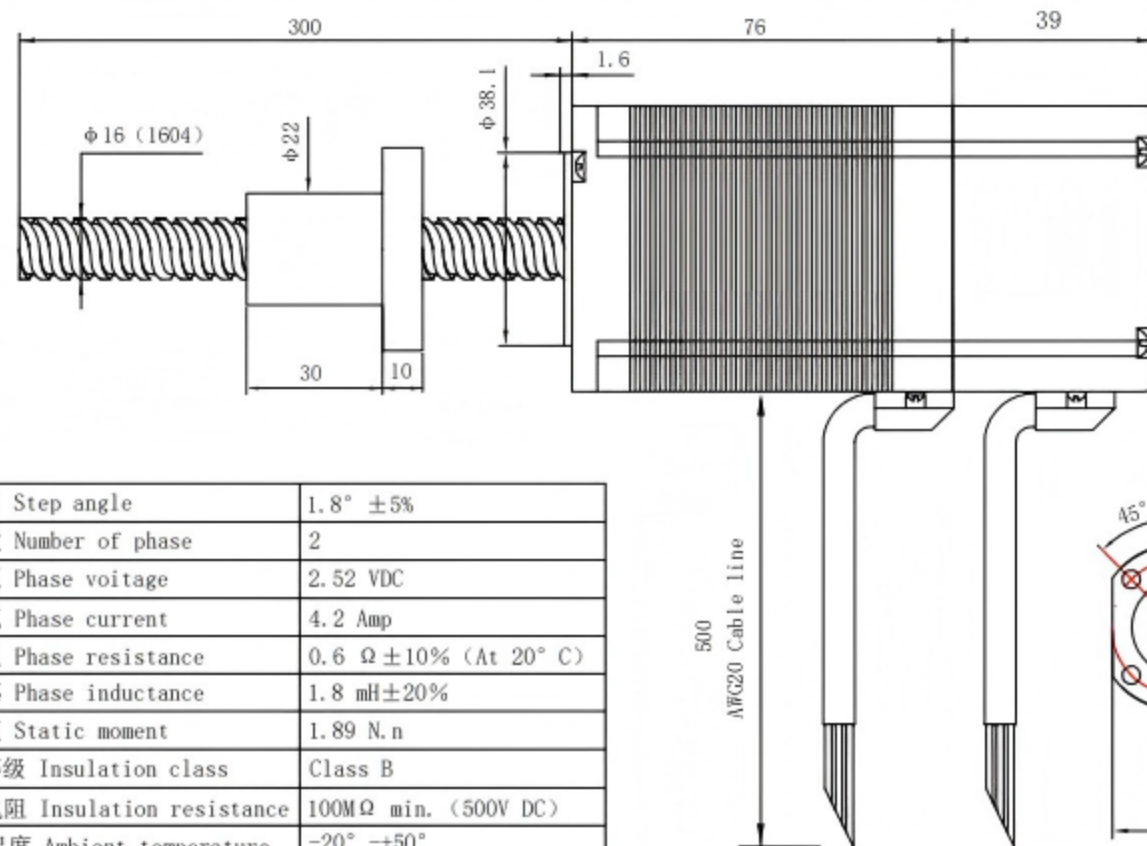

1.步距角 Step angle	$1.8^\circ \pm 5\%$
2.相数 Number of phase	2
3.相电压 Phase voltage	2.52 VDC
4.相电流 Phase current	4.2 Amp
5.相电阻 Phase resistance	$0.6 \Omega \pm 10\%$ (At 20°C)
6.相电感 Phase inductance	$1.8 \text{ mH} \pm 20\%$
7.静力矩 Static moment	1.89 N.m
8.绝缘等级 Insulation class	Class B
9.绝缘电阻 Insulation resistance	$100 \text{ M}\Omega \text{ min. (500V DC)}$
10.环境温度 Ambient temperature	$-20^\circ \text{ to } +50^\circ$
11.环境湿度 Ambient hum	15% to 95%
12.电机重量 Motor weight	Approx 1.3 Kg
13.使用电压 Use voltage	VDC:24-48V VAC:24-36
14.推荐驱动器 Recommended drive	OK2D656T OR OK2D872

Excitation sequence and direction of clockwise

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

seen from the mounting surface it is clockwise

Power off brake	
Voltage	24 VDC
Current	0.11 Amp
Moment	2.0 N.m
Power	2.7W
Definition	RED+ BLK-

工艺 Technology		单位 Unit	mm		DRAWING	57DL76-300G-1604-SC
设计 Design						
审核 Chcek				Shenzhen Sunshine Sea Technology Co.,Ltd		
批准 Approved	Betty Y	比列 Scale	1: 1			